

RAVAS-1

Pallet truck load indication system



BENEFITS

- Attractively priced entry model
- Virtually indestructable
- Water tight: for use onboard lorries
- Standard fork dimensions

Top quality

Great value for money



RAVAS PERFORMANCE LINE

RAVAS


FUNCTIONS

- Manual zero correction
- Totalling with sequence number
- Lifting height indication in display
- Only zero setting and weighing on reference height
- Error messages in display
- Automatic switch-of

STANDARD SPECIFICATIONS

- Weighing capacity 2.200 kg
- Graduation 5 kg
- Tolerance 0.8% of full scale
- Display LCD
- Keypad 2 function keys
- Protection class IP65
- Steering wheels rubber
- Loading wheels polyurethane, single
- Colour red (RAL 3000), epoxy painted
- Own weight 58 kg
- Power supply 2 AA-batteries
- Battery life 3,000 on/of weighing cycles of 3 minutes:
automatic switch-of after 2 minutes
- Pump quick lift

DIMENSIONS IN MM

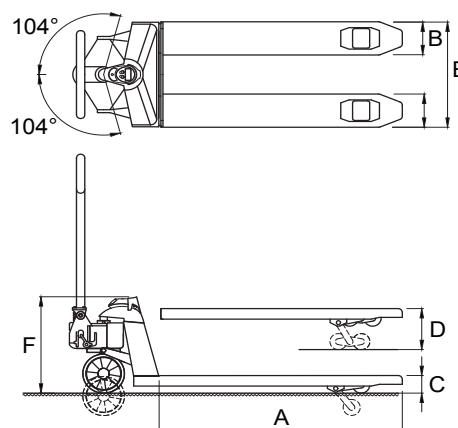

A	Fork length	1150
B	Fork width	150
C	Minimum fork height	83
	Minimum space between floor and forks	30
D	Maximum fork height	205
	Lifting height	122
E	Width over forks	520
F	Height to top indicator	495



Management
System
ISO 9001:2015
ISO 14001:2015
ISO 45001:2018
www.tuv.com
ID 0000037200

PREMIUM OPTIONS*

- Tandem loading wheels in polyurethane
- Footbrake

RAVAS Europe B.V.

Toepadweg 7, 5301 KA Zaltbommel, The Netherlands

T: +31 418 515220 E: salesoffice@ravas.com

WWW.RAVAS.COM

RAVAS