

RAVAS-2100EXi

Explosion proof pallet truck scale

BENEFITS

- System certification ATEX II 2 G Ex ib IIB T4 Gb & ATEX II 2 D Ex ib IIIC T135°C Db
- Approval number DEKRA 13ATEX 0044
- Rotating indicator and big push buttons, option
- Exchangeable battery pack
- Stainless steel forks
- Antistatic steering wheels
- For mixing and batching in zone 1/21

Top quality

For hazardous areas



RAVAS


FUNCTIONS

- Automatic and manual zero correction
- Gross/net weighing
- Automatic tare over the full scale. Pre-set tare maximum first range (200 kg)
- Error messages in display
- Automatic switch-off after 30 minutes of non-use
- Low battery warning in display

STANDARD SPECIFICATIONS

- Weighing capacity 2,200 kg
- Graduation multirange:
0 - 200 kg: graduation 0.2 kg
200 - 500 kg: graduation 0.5 kg
500 - 2,200 kg: graduation 1 kg
- Max. tolerance 0.1% of the load lifted
- System certification II 2 G Ex ib IIB T4 Gb & II 2 D Ex ib IIIC T135°C Db, approval number DEKRA 13ATEX 0044
- Display LCD, digit height 18 mm
- Keypad foil keypad, 3 function keys, on/off key, resistant to chemicals
- Protection class load cells IP67, indicator IP65
- Fork shoes stainless steel
- Battery intrinsically safe, approval number DEKRA 13ATEX 0043, 8Vdc/3.5 Ah, rechargeable, exchangeable, maintenance free
- Battery life 100 hours, low battery indication
- Charger 230V/8Vdc - 1 A; for use outside hazardous zone
- Charging time approximately 8 hours
- Steering wheels rubber, antistatic < 10⁹ohm
- Loading wheels polyurethane, single
- Colour red (RAL 3000), epoxy painted
- Own weight 130 kg
- Pump quick lift

DIMENSIONS IN MM

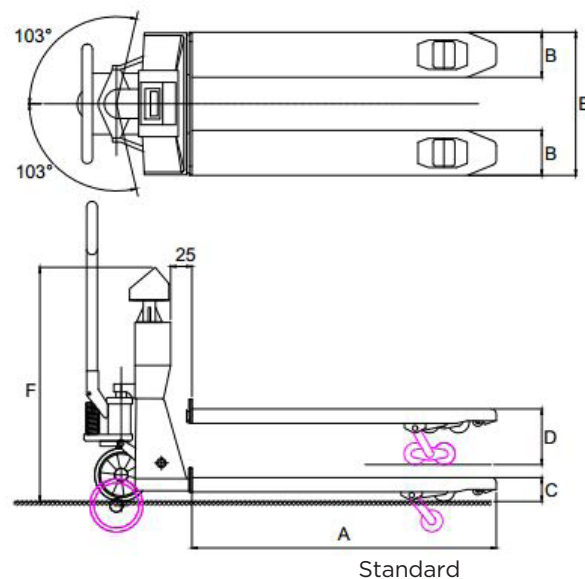

A	Fork length	1150
B	Fork width	170
C	Minimum fork height	87
	Space underneath fork	22
D	Maximum fork height	205
	Lifting height	120
E	Width over forks	540
F	Height to top indicator	945

For approved versions, class OIML III: European approval no. T2782, switch-off of display when tilting more than 2°. Graduation: multirange 0,2/0,5/1 kg, or one of the following fixed graduations:

- 1.000 divisions: 1,0/1.000 kg or 2,0/2.000 kg
- 2.000 divisions: 0,5/1.000 kg or 1,0/2.000 kg



Management System
ISO 9001:2015
ISO 14001:2015
ISO 45001:2018
www.tuv.com
ID 0000037200

OPTIONS*

- Extra exchangeable battery pack
- Integrated Bluetooth feature for data transfer to PDA
- Legal for trade version, OIML III
- Full stainless steel truck
- Rotating indicator
- Big push buttons for use with gloves

RAVAS Europe B.V.

Toepadweg 7, 5301 KA Zaltbommel, The Netherlands

T: +31 418 515220 E: salesoffice@ravas.com

WWW.RAVAS.COM

